


## Structure and technical specs for F range

Hinged structure:

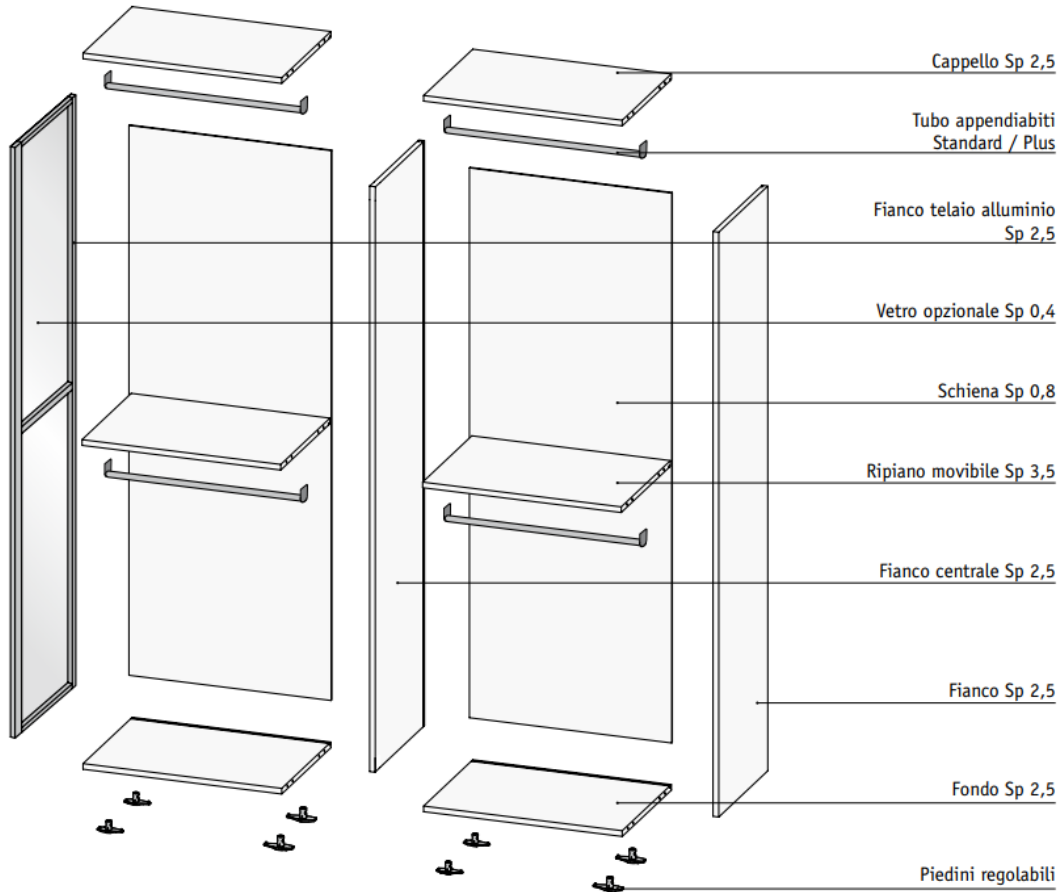

The fitting should start from left to right. A gap of 4cm to end side is needed for the assembling.

Soft closing hinges and runners.

Full extraction runners also available.

Door thickness from 1.8 to 2.9 cm depending on door type selected.


Depth reduction available

Width and height reduction depending on door type selected.

Two types of hanging bars available.

Sliding structure:

**voli**

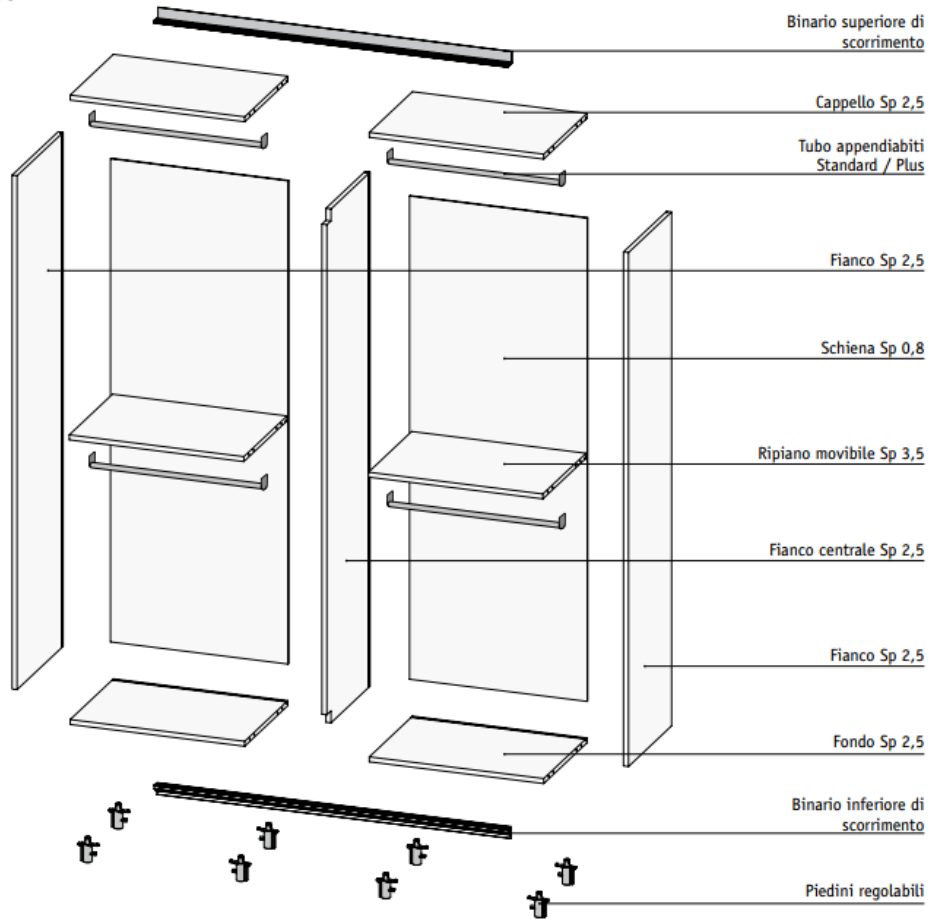

chiusura.

A minimum side gap of 4cm and on top also 4cm is required for proper assembling.

Soft opening and closing system at the doors.

Soft closing runners for drawers.

Full extraction runners also available.

Door thickness from 1.8 to 3.8 cm depending on door type selected.

Depth reduction available

Height reduction depending on door type selected.

Width reduction not permitted

Two types of hanging bars available.